

Any non-compliance shall obligate the violator to compensate for damages. In case any patent is issued or a utility model is registered, or in case of any other industrial property rights, all such rights must be reserved for us.

BEDIA Motorteknik GmbH & Co.KG, Altdorf bei Nürnberg

The copyright to this drawing belongs to us. No duplication or transfer to, providing access to or communicating to any third parties is allowed of its contents or excerpts thereof. This drawing may not be used without our approval for any purpose other than that for which it has been entrusted to the recipient.

Technical data

Medium oil [Ⓐ]
 Function Minimum - quiescent current (rc)
 Operating voltage 12 / 24 V (-25% / +50%) (9 - 36 VDC)
 Current consumption typ. < 8 mA
 Output high side switch
 ≤ 1 A over the whole temperature range
 short-circuit and overload protected over the ambient temperature range. At inductive loads freewheeling diode e.g. 1N4007, has to be mounted at the load.
 Mounting thread M18x1,5
 Function control 0 seconds ± 5%
 Fault indication delay 7 seconds ± 5%
 Connection connector bayonet 10SL
 Housing material X5CrNi18 10
 EN 10088-3:1.4301
 capacitive connected to ground
 Probe coating Tefzel® ETFE
 Probe protection IP 67 to DIN40050
 Weight [Ⓐ] approx. 105 g
 Marking manufacturer; type; manufacturer no.; SN; year / week; approvals
 Switch point hysteresis typ. < 3 mm
 Reference medium paraffin oil, ε_r = 2,0..2,4, for switchpoint adjustment
 Medium temperature -40 °C to +150 °C (-40 °F to +302 °F)
 Ambient temperature -40 °C to +125 °C (-40 °F to +257 °F)
 Storage temperature -50 °C to +125 °C (-58 °F to +257 °F)
 Mounting position optional
 Reverse polarity protection inbuilt between positive and negative terminal

Caution !!

Do not connect positive potential to signal terminal of the sensor and negative potential to positive terminal of the sensor.



Approvals [Ⓐ] ABS, BV, CCS, DNV, GL, KR, LR, NKK, RINA, RMRS
 Customs tariff number 90261029

Environmental simulations


Vibration ISO 16750-3:2007 10 Hz - 2000 Hz 20 g
 Free Fall IEC 16750
 Mechanical Shock DIN EN 60068-2-27:1995; 100 g / 11ms
 Dry Cold DIN EN 60068-2-1:2006; -40 °C / 24 h (-40 °F / 24 h)
 Dry Heat DIN EN 60068-2-2:2008; +125 °C / 96 h (+257 °F / 96 h)
 Temperature cycling DIN EN 60068-2-14:2000
 Damp Heat DIN EN 60068-2-78:2002
 Damp Heat, steady state DIN EN 60068-2-30:2006
 Salt spray DIN EN 60068-2-52:1996
 Flame retardant DIN 75 200
 Pressure resistance 2,5 MPa (25 bar / 362,6 psi) (25°C / 77°F / 1 h)

EMC


Conducted emission from the power port CISPR 16 10 kHz - 30 MHz
 Electric field radiated emissions CISPR 16 150 kHz - 2 GHz
 RF electromagnetic fields EN 61000-4-3 1 MHz - 2 GHz; 100 V / m
 Conducted interference EN 61000-4-6 150 kHz - 80 MHz; 10 V
 Conducted interference IEC 60533 50 Hz - 10 kHz; 3 V / 0,5 V
 ESD EN 61000-4-2 ± 8 kV Contact / Air discharge
 Burst EN 61000-4-4 ± 2 kV DC power port / signal lines
 Surge EN 61000-4-5 ± 1 kV line <-> ground
 ± 0,5 kV line <-> line
 High voltage IEC 60092-504 550 V
 Power supply variations and interruptions EN 61000-4-11 Ub +50% / -25%

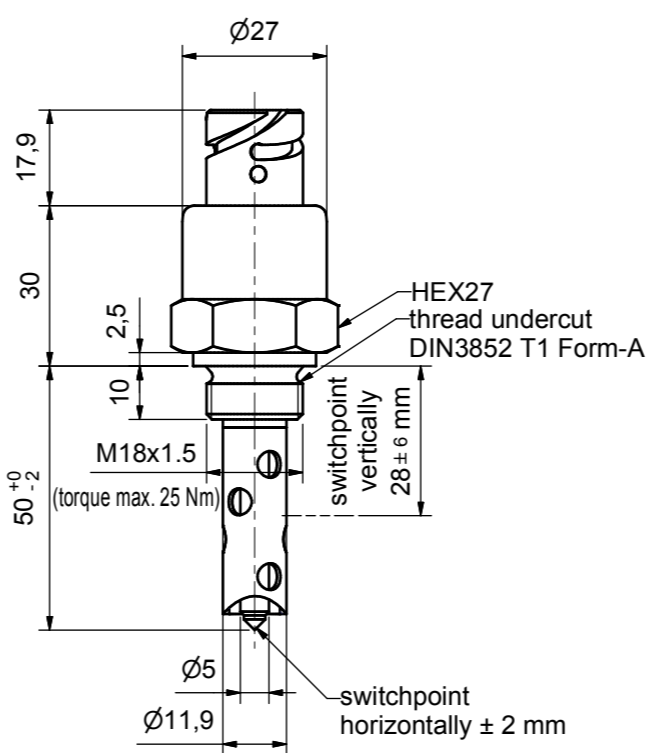


A = positive (+)
 B = negative (-)
 C = signal (S)

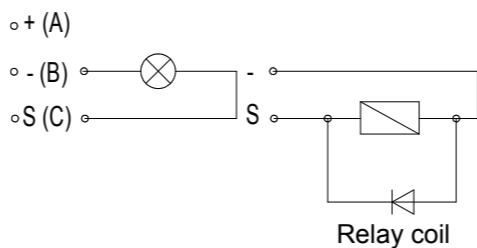

Block diagram

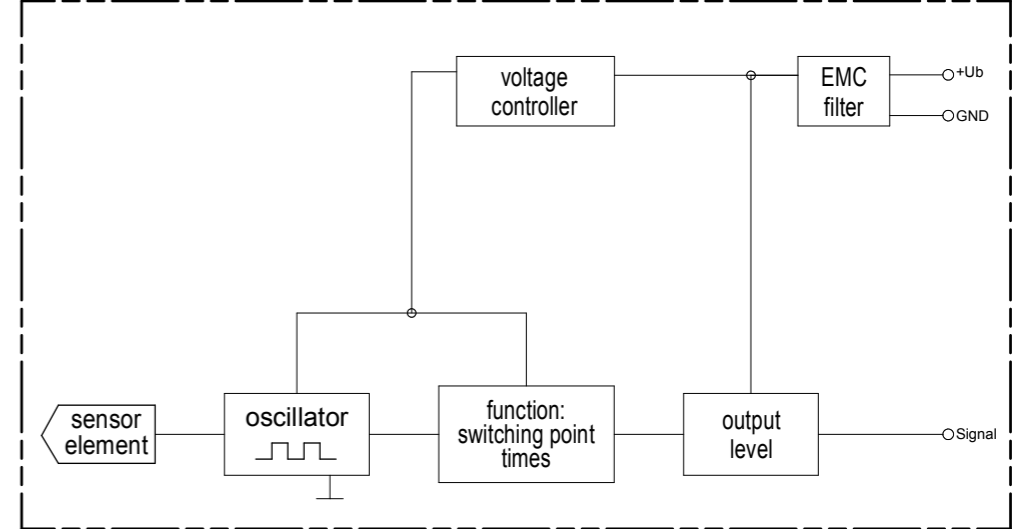

Functional diagram for MINIMUM Probes

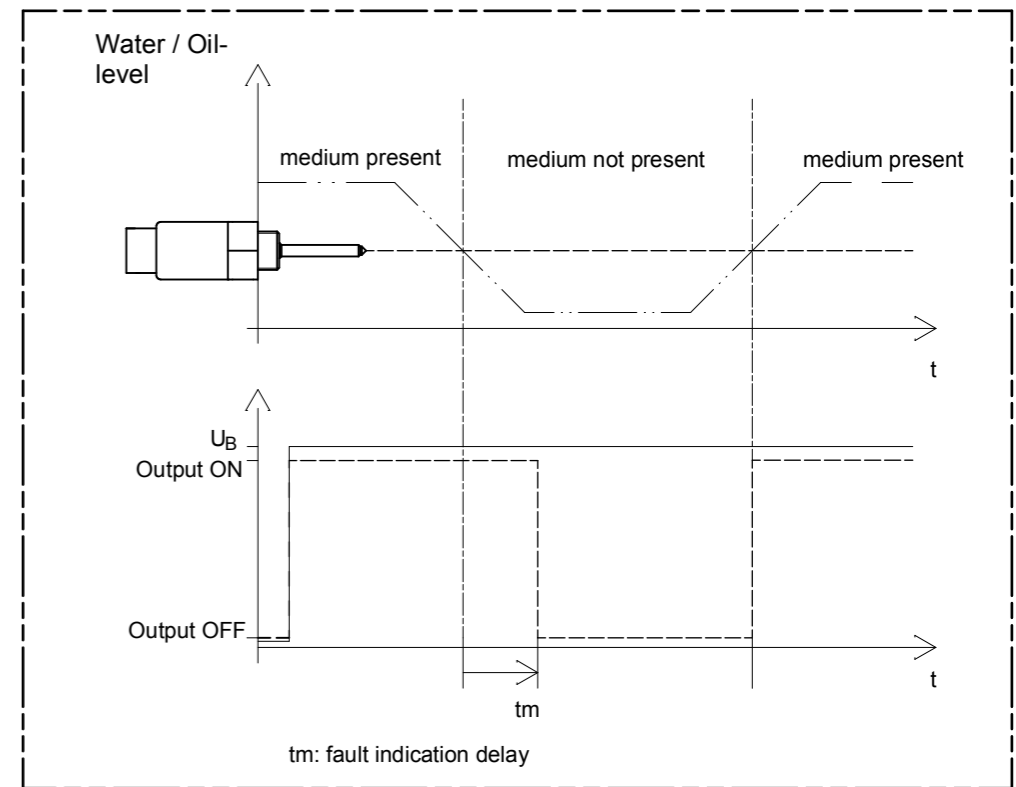

field of application	admissible tolerance	surface	scale 1:1	position -	amount -
	ISO2768-mK				
	date	name	description		
	created by 28.09.2009	Moderer	CLS-50 oil level sensor high side switch - quiescent current with connector bayonet 10SL		
	checked by 30.09.2009	Saß			
			drawing number	sheet	
			500088	1/1	
a	see data	26.02.10	Moderer/Saß	drawing path: I:\CAD\50050088\US\dwg	
rev.	modification	date	name/checked by		