


S32SR-VP44X


Inductive Sensor – Amplifier for Ring Probe



Features


- Rectangular, height 32 mm
- Plastic, ABS
- Static output behaviour
- Sensitivity adjusted via potentiometer
- Modular design, mountable with different ring probes Ø 10, 20, 40 and 65 mm
- Output pulse length min. 100 ms
- DC 4-wire, 10...55 VDC
- Changeover contact, PNP output
- Terminal chamber

Wiring diagram



Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this purpose they use a high-frequency electromagnetic AC field that interacts with the target. Inductive ring sensors generate this field through an LC resonant circuit. The target acts as the coil core.

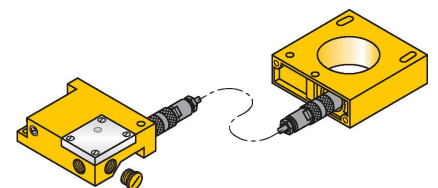

Technical data


Type	S32SR-VP44X
ID	1440010
General data	
Repeat accuracy	≤ 2 % of full scale
pulse stop	≥ 5 ms
Pulse duration at the output	≥ 100 ms ± 20 %
Electrical data	
Operating voltage	10...55 VDC
Residual ripple	≤ 10 % U _{ss}
DC rated operational current	≤ 200 mA
No-load current	20 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I _s	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	4-wire, Complementary contact, PNP
Switching frequency	0.008 kHz
Mechanical data	
Design	Ring amplifier, S32
Dimensions	74 x 100 x 32 mm
Housing material	Plastic, ABS
Electrical connection	Terminal chamber
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)

Technical data

Shock resistance	30 g (11 ms)
Protection class	IP65
Switching state	LED, Yellow
Included in delivery	cable gland, blanking plug

Accessories

ADAPTER CABLE RING 1.6M 14306



Adapter cable enables separate mounting of ring probe and switching amplifier; coax cable: RG58 C/U 50 Ohm