

Cycle Timer

Field proven since many years.
The plug-in timer series from comat
for highest quality requirements and
unattained versatile operation.

RS 122-M

Universal Cycle Timer
• pulse or interval start
• Time range 0, 1s - 30min
• 2 change-over contacts



RS 122-MH

Universal Cycle Timer
• pulse or interval start
• Time range: pulse 0, 1s - 30min
interval 0, 1min - 30h
• 2 change-over contacts

RS 122-H

Universal Cycle Timer
• pulse or interval start
• Time range 0, 1min - 30h
• 2 change-over contacts

Triggering



E-I Triggering
Function (page *)

Time range

I-O
P-2

I-O
P-2

I-O
P-2

t I: 0,1s-30min
t P: 0,1s-30min

t I: 0,1s-30min
t P: 0,1min-30h

t I: 0,1min-30h
t P: 0,1min-30h



μ MAX

5 A 250V~

5 A 250V~

5 A 250V~

Diagram
Connection
with socket C11A



~ AC 50/60Hz	AC220-240V	ATX
	AC110-120V	ANP
~ UC AC/DC	UC24-48V	UFK
	UC12V	UCB
== DC $\pm 10\%$	DC110-240V	DNX

~ AC 50/60Hz	AC220-240V	ATX
	AC110-120V	ANP
~ UC AC/DC	UC24-48V	UFK
	UC12V	UCB
== DC $\pm 10\%$	DC110-240V	DNX

~ AC 50/60Hz	AC220-240V	ATX
	AC110-120V	ANP
~ UC AC/DC	UC24-48V	UFK
	UC12V	UCB
== DC $\pm 10\%$	DC110-240V	DNX


Ordering no. →

RS 122-M/ ...

RS 122-MH/ ...

RS 122-H/ ...

System socket C11A
Figure: with plug-in neutral conductor
connector C-A2 (standard delivery).

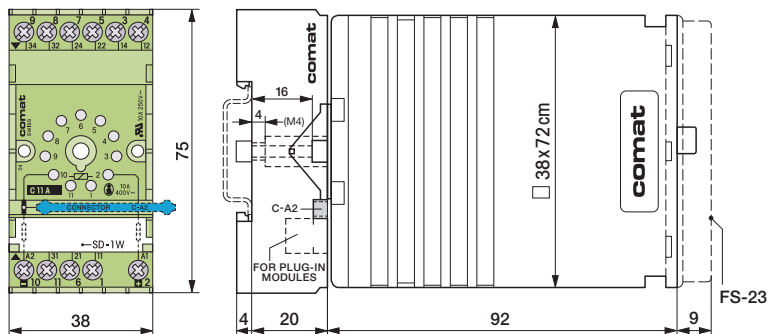

Ordering example

Timer RS 122-M/ATX
Socket C11A