


Lina 25™ cable ducting

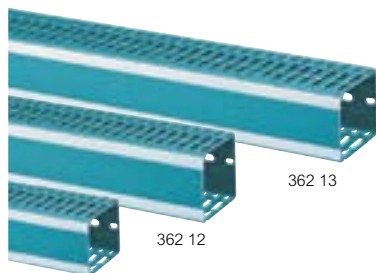

362 01

362 12

362 13



367 10



395 98



Manually separable trunking


Tabs can be separated using pliers
Cat.No 367 10

Technical characteristics (p. 364)

Pack	Cat.Nos	Lina 25 ducting	
		RAL 2525 blue PVC, approvals CSA (Canada), UL (USA), conform to EN 50085-2-3 Side perforations at intervals of 12.5 mm Length: 2 m Width x height (mm)	
60 ⁽¹⁾	362 00	25 x 25	
56 ⁽¹⁾	362 01	25 x 40	
56 ⁽¹⁾	362 02	25 x 60	
40 ⁽¹⁾	362 03	25 x 80	
56 ⁽¹⁾	362 05	40 x 25	
48 ⁽¹⁾	362 06	40 x 40	
48 ⁽¹⁾	362 07	40 x 60	
40 ⁽¹⁾	362 08	40 x 80	
32 ⁽¹⁾	362 11	60 x 40	
32 ⁽¹⁾	362 12	60 x 60	
32 ⁽¹⁾	362 13	60 x 80	
24 ⁽¹⁾	362 16	80 x 60	
24 ⁽¹⁾	362 17	80 x 80	
16 ⁽¹⁾	362 25	120 x 80	

Lina 25 cutter tool		
1	367 10	For a straight break with fingers


Sleeving		
Braided sleeving		
Black polyester Supplied in 25 m roll in dispenser box with an indicator 3 m before end		
	∅ of roll	∅ variations
1	366 38	20 mm 10 to 30 mm
1	366 39	30 mm 18 to 54 mm
Spiral sleeving		
25	6361 78	12 mm
25	6361 83	22 mm



Black felt-tip pen		
10	395 98	Black felt-tip pen indelible for marking

Linafix isolating fixing accessories

Pack	Cat.Nos	Material polyamide 6/6 Enable fixing of cable ducting on any support by 1/4 turn
20	367 00	On chassis-rail Holds the ducting in place vertically
100	366 40	On rails □, ⊥ 15 mm depth 1/4 turn
20	366 41	On Lina 25 perforated plates Clip-on 1/4 turn
20	366 42	On door Fits under control and signalling auxiliaries Osmoz (∅22) Also enables direct fixing of test-lamps
10	366 43	On Lina 25 uprights Double adjustment to enable alignment with the perforations at the bottom of cable ducting Can be used to fix vertical or horizontal ducting (possible reinforcement with rail ⊥, 15 mm depth) To be clipped on
100	366 46	On plain plates plastic rivet length 12 mm for solid plates up to 30 / 10 th Drilling ∅: 5.5 to 6 mm
500	366 44	On plain plates, Lina 12.5 and perforated plates, Lina 25 for cabinets Reinforced plastic rivet ∅6 mm Drilling ∅: 6 mm
100	347 45	Screw caps H 4.8 x 16 mm self-drilling, self-tapping for ∅3.3 mm
200	347 50	Screw cover, for isolating screws head Cat.No 347 45 inside the trunking
50	367 01	Cable retainer To clip-on the fingers

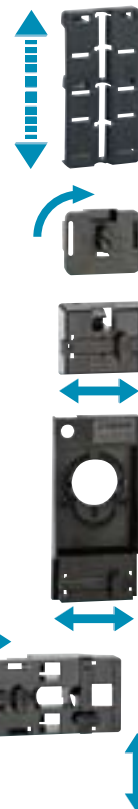

(1) Number of metres in pack