



SERIES WITH DOUBLE INLET AND OUTLET PAINTED STEEL



In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X



S. 430



	Article	Connection		Equipped with	
		inlet	outlet	2 swivels	seals
Air - Water 20 bar	8430.1000	F1/2"G	M3/8"G	brass	viton
Oil - Water 200 bar	8430.3000	F3/8"G	M3/8"G	AISI 304 stainless steel	viton
Oil - Paint 200 bar	8430.4000	F1/2"G	M3/8"G	steel	polyurethane
Oil 400 bar	8430.5000	F3/8"G	M3/8"G	steel	polyurethane

S. 530



Air - Water 20 bar	8530.1000	F1/2"G	M3/8"G	brass	viton
Oil - Water 200 bar	8530.3000	F3/8"G	M3/8"G	AISI 304 stainless steel	viton
Oil - Paint 200 bar	8530.4000	F1/2"G	M3/8"G	steel	polyurethane
Oil 400 bar	8530.5000	F3/8"G	M3/8"G	steel	polyurethane


S. 540



Oil 400 bar	8540.5000	F3/8"G	M3/8"G	steel	polyurethane
--------------------	-----------	--------	--------	-------	--------------

Hose reels for dual hoses can be used for the applications where it is requested the distribution of two fluids simultaneously (e.g. air and paint in painting systems) or the recycle of the same fluid (e.g. for hydraulic tools).

FIXED OVERALL DIMENSIONS

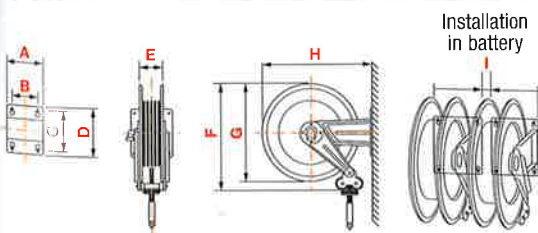

Art.	A	B	C	D	E	F	G	H	I	1-m ³	Kg
S. 430	186	140	196	226	115	460	420	460	20	0,098	17,5
S. 530	203	153	220	258	115	550	510	560	20	0,120	24,5
S. 540	300	218	228	268	190	550	510	573	0	0,175	30

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The template supplied facilitates drilling of the holes and there fore hose reel fixing.

