




Bestell-Nr.	Code	Anschluss-gewinde	max. Volumenstrom l/min	max. Druck bar	Berstdruck bar	Betriebstemp. °C	Gewicht Kg	Material Körper	zugehörige Kontermutter	
240-118-01000	FT2257/5-18	1/8"	6,3	400	1600	-20°/+130°	0,13	1.4401 - AISI 316	240-130-01000	240-130-01300
240-118-01050	FT2257/5-14	1/4"	14	400	1600		0,25		240-130-01050	240-130-01350
240-118-01100	FT2257/5-38	3/8"	33	400	1600		0,5		240-130-01100	240-130-01400
240-118-01150	FT2257/5-12	1/2"	48	400	1600		0,75		240-130-01150	240-130-01450
240-118-01200	FT2257/5-34	3/4"	88	400	1600		1,6		-	240-130-01500
240-118-01250	FT2257/5-100	1"	190	320	1300		3,05		-	240-130-01550
240-118-01300	FT2257/5-114	1-1/4"	200	320	1300		3,75		-	240-130-01600
240-118-01350	FT2257/5-112	1-1/2"	210	320	1300		5,76		-	-
240-118-01400	FT2257/5-200	2"	205	320	1300		10		-	-

Type	Bemessung									
	A	B	C	D	E	ØF	ØF1	G	H	SW
18	1/8"G	8,5	50	59	64	22	40	13,5	M17x1	16
14	1/4"G	12,5	66	71	78	27	50	17	M20x1	20
38	3/8"G	12,5	79	84	93	33	70	19,5	M25x1,5	25
12	1/2"G	15,5	94,5	97	107	38	80	21	M30x1,5	30
34	3/4"G	17	115	120,5	132,5	47	100	26,5	M40x1,5	40
100	1"G	20	138,5	151,5	167,5	58	120	35	M50x1,5	50
114	1 1/4"G	22	157	156,5	172,5	58	120	35	M50x1,5	55
112	1 1/2"G	24	190	167	181	58	120	35	M55x2	65
200	2"G	27	228	188	202	108	-	44	M65x2	75





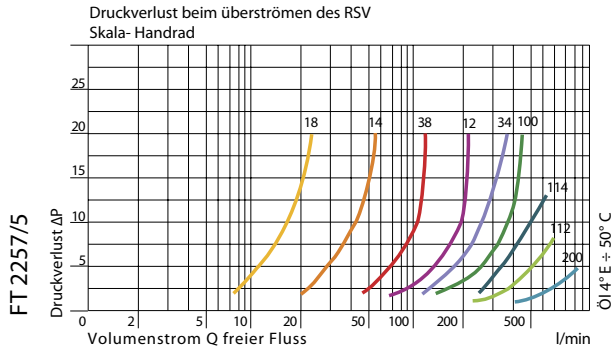



FT 2257/5 - 100

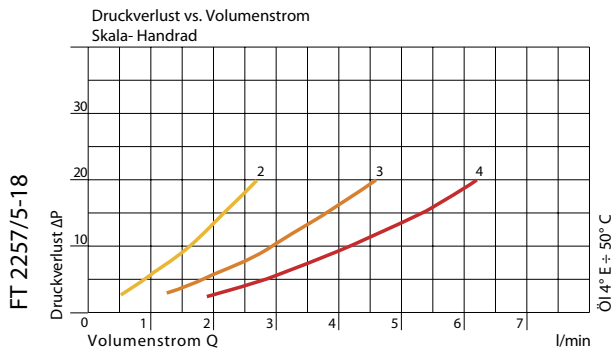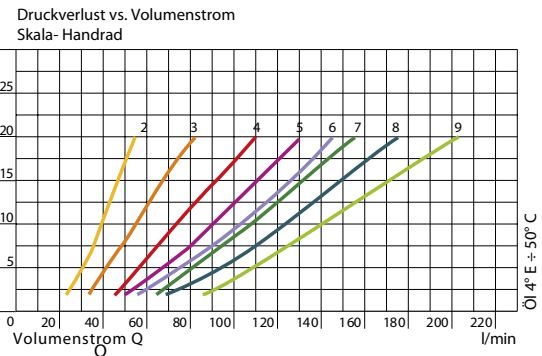



FT 2257/5 - 34

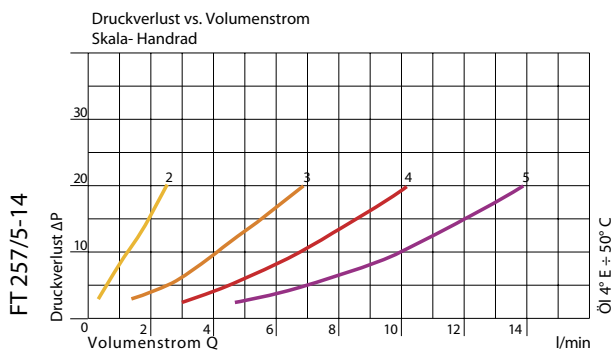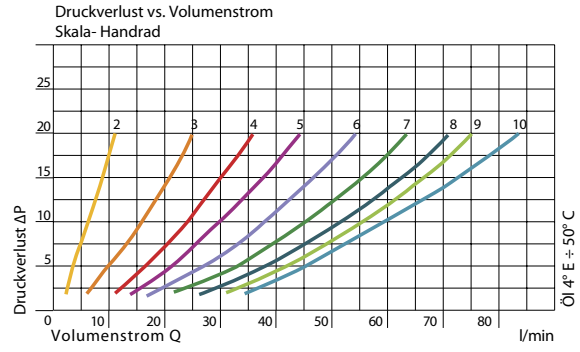

FT 2257/5 - 114

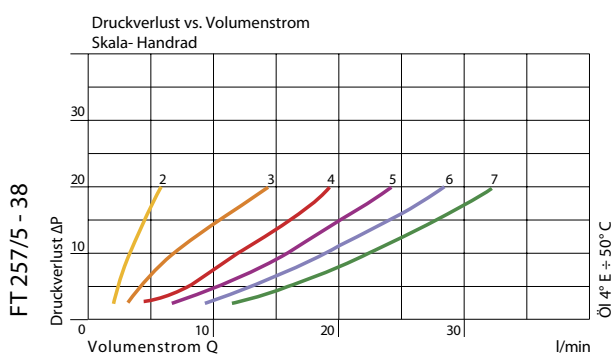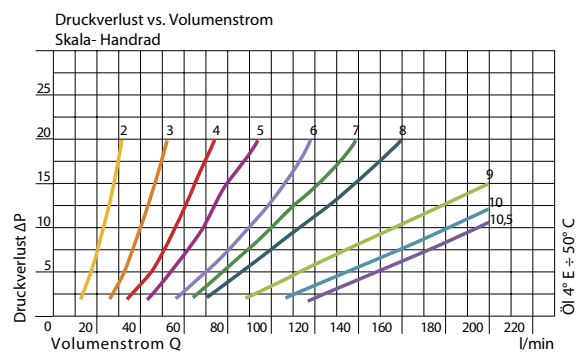

FT 257/5 - 112

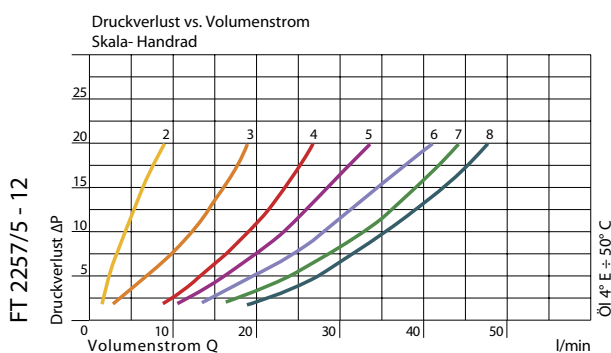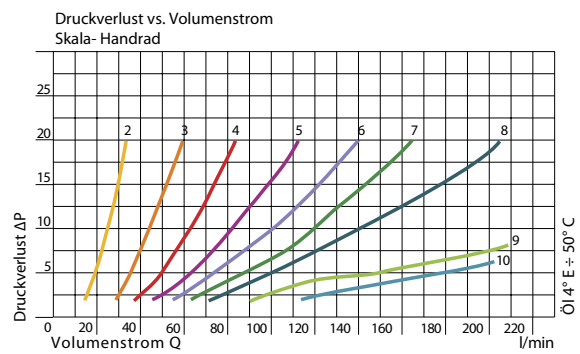

FT 2257/5 - 200

