

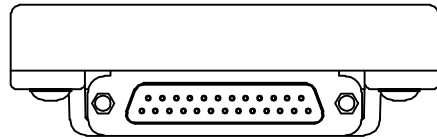


## SPECIFICATIONS


HOUSING	POLYCARBONATE
CONNECTORS	P1: 25-PIN D-SUB MALE 94 V-O, U.L. RATED J0-J15: PICO MFK-3 36 VDC, VDE 0110
OPERATING FEATURES	VOLTAGE: 36 VDC, 8 A TOTAL. 0.5 A PER CONNECTOR OPERATING TEMPERATURE: -40°C TO +70°C (-40°F TO +158°F) STORAGE TEMPERATURE: -40°C TO +85°C (-40°F TO +185°F)
SUGGESTED MATING CORDSETS	DBK25-*M
SCHEMATIC	SEE SHEET 2

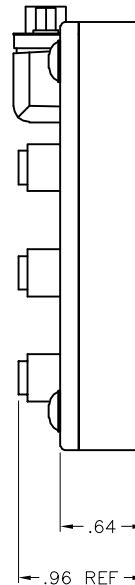


#6-32 X .75 LG (MIN) SOCKET HEAD  
-OR-  
M3 X 0.5 X 20 LG (MIN) SOCKET HEAD

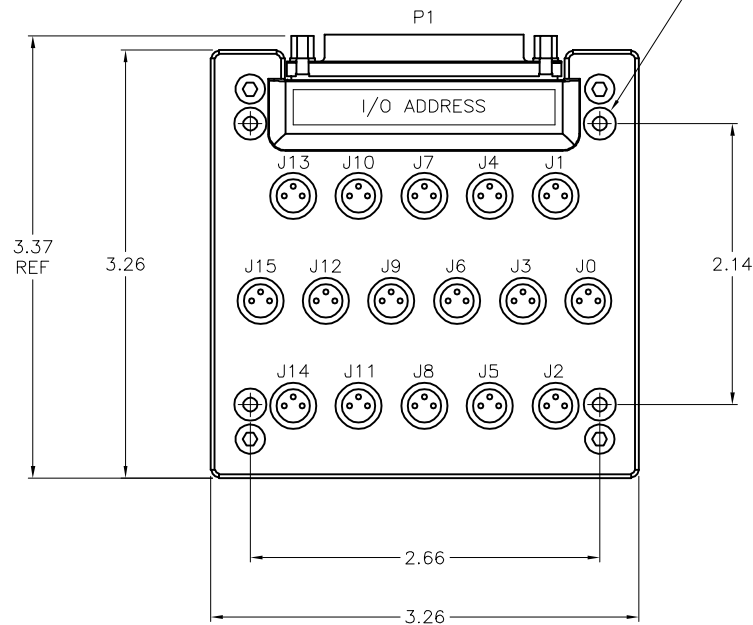

### FEMALE END VIEW J0-J15

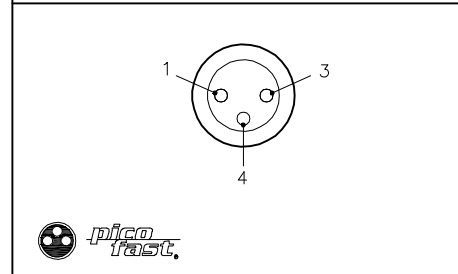

### MALE END VIEW P1

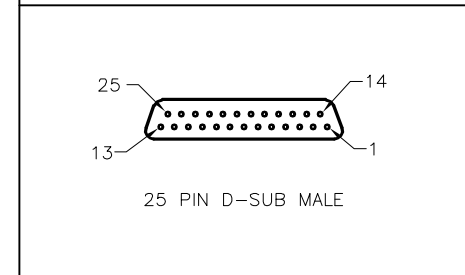

**SOURCE DRAWING - FOR REFERENCE ONLY**

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<b>TURCK</b>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL	DRFT CBM	DATE 07/16/97	DESCRIPTION PTP 16-DBS25			
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=1.5	UNIT OF MEASUREMENT <b>INCHES</b>		IDENTIFICATION NO. U0061	REV D
D	UPDATE LABEL PER ECO	TR	11/23/11	37270	DO NOT SCALE THIS DRAWING		
REV	DESCRIPTION	BY	DATE	ECO NO.	FILE: U0061	SHEET 1 OF 2	

D	UPDATE LABEL PER ECO	TR	11/23/11	37270
REV	DESCRIPTION	BY	DATE	ECO NO.