

REAR MOUNTING

MB34



2 hole rear mounting or snap mounting on DIN EN50022 rail (35mm) and operable from the front (door) coupled with door mechanism.

Door interlock (door openable only in OFF position).

Degree of protection : Front IP65.

Rigid metal shaft/switch assembly.

Switch with round padlocking device to prevent the Switch from being made ON by unauthorised persons.


Max.3 padlocks as under.

16A-20A: Max. 1 padlock


25A-63A: Max. 2 padlocks

80A-125A: Max. 3 padlocks


16A-20A

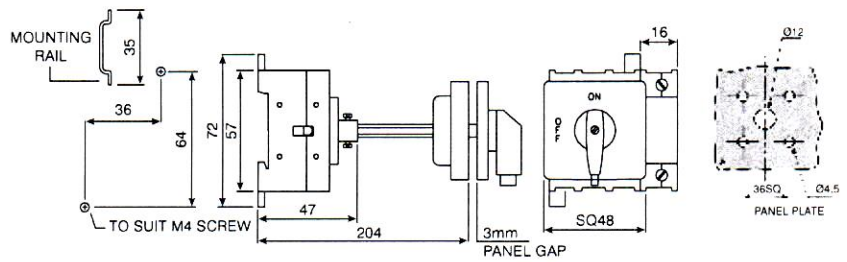

25A-63A

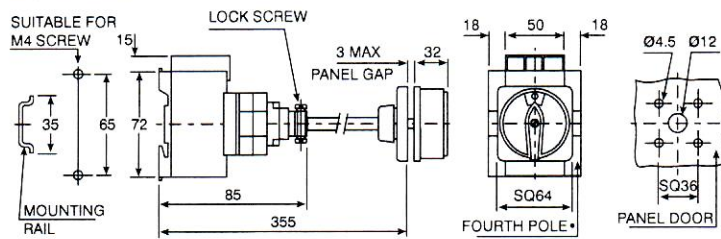

80A-125A

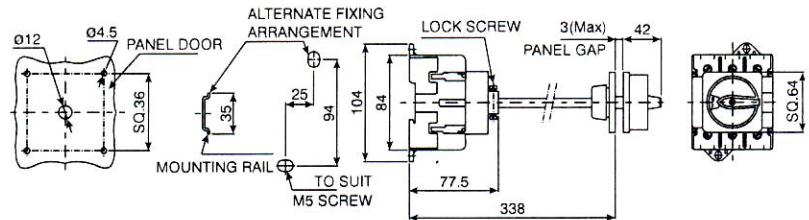

Adjustable mounting by cutting the metal shaft to appropriate length, to suit panel height.

Specific Length of shaft can be offered on request.

Notes: