

Socket model ES 50

ES50CNER - Pack. 10/240 pcs

Relay socket Model ES 50, for miniature power relay or miniature switching relay or solid-state relay with 1 or 2 PDT and 5 mm pinning, 2/2 level design, screw connections, connection facility for input interference suppression modules.


Rated current / Rated voltage	12 A / 300 V (CSA)
	10 A / 300 V (UL)
Dielectric strength adjacent contact circuits	2500V
Dielectric strength coil contact circuits	2500V

Connection data

Conductor cross section solid and stranded	min. 0,5 mm ²
Conductor cross section solid and stranded	max. 2,5 mm ²
Conductor cross section AWG	min. 20
Conductor cross section AWG	max 14
Stripping length	7 mm
Screw thread	M3

General data

Width	15,6 mm
Height	75,5 mm
Color	Black
Ambient temperature (operation)	-25 °C ... 85 °C

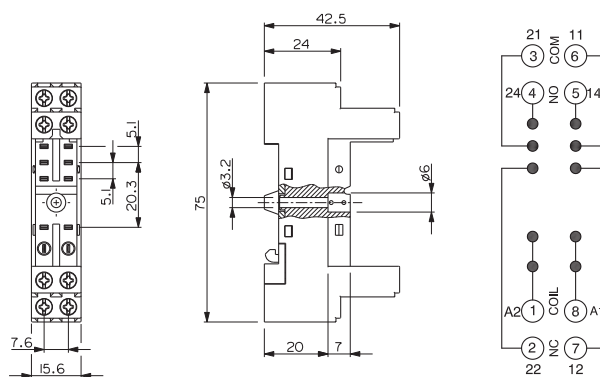

Accessories



Model TR

TR - Pack. 10/1000 pcs

Plate for ES50, ES35, ES32, ES25, ES50/3G, ES50/3S, ES35/3S, ES15/4-2B, ES15/4-2G



Model MS 16

MS16 - Pack. 10/200 pcs

Spring for relay securing and releasing

Material: Thermoplastic

Relay height: 15,5-16,5 mm

Supported sockets:

ES50-35-32-25, ES50/3, ES50/3S, ES35/3S, ES50/3G



Model MS 16 C

MS16C - Pack. 10/200 pcs

Spring for relay securing and releasing

Material: Thermoplastic

Relay height: 15,5-16,5 mm

Supported sockets:

ES50-35-32-25, ES50/3, ES50/3S, ES35/3S, ES50/3G



Model MS 25

MS25 - Pack. 10/200 pcs

Spring for relay securing and releasing

Material: Thermoplastic

Relay height: 25-25,5 mm

Supported sockets:

ES50-35-32-25, ES50/3, ES50/3S, ES35/3S, ES50/3G

Standard article