

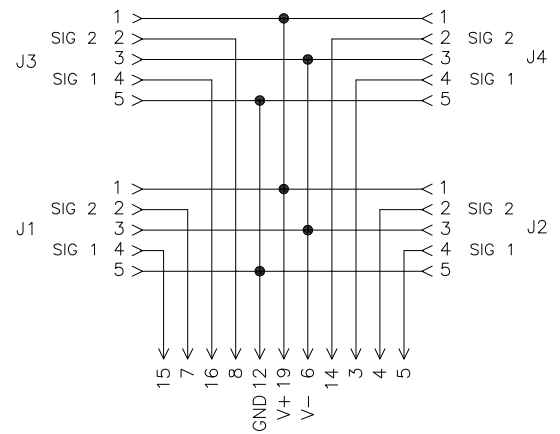


SPECIFICATIONS	
CABLE DATA	
MATING CORDSET	CKM 19-11-* or CKM19-11-*/S90
MATERIAL	
HOUSING/COLOR	NYLON/YELLOW
RECEPTACLE HOUSING/FINISH	NICKEL-PLATED BRASS
CONTACT CARRIERS/COLOR	NYLON OR TPU/BLACK
CONTACTS	GOLD-PLATED BRASS
SEALING O-RING	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
MAXIMUM CURRENT	4.0 AMPS PER PORT, 9.0 AMPS TOTAL
SPACINGS	to VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

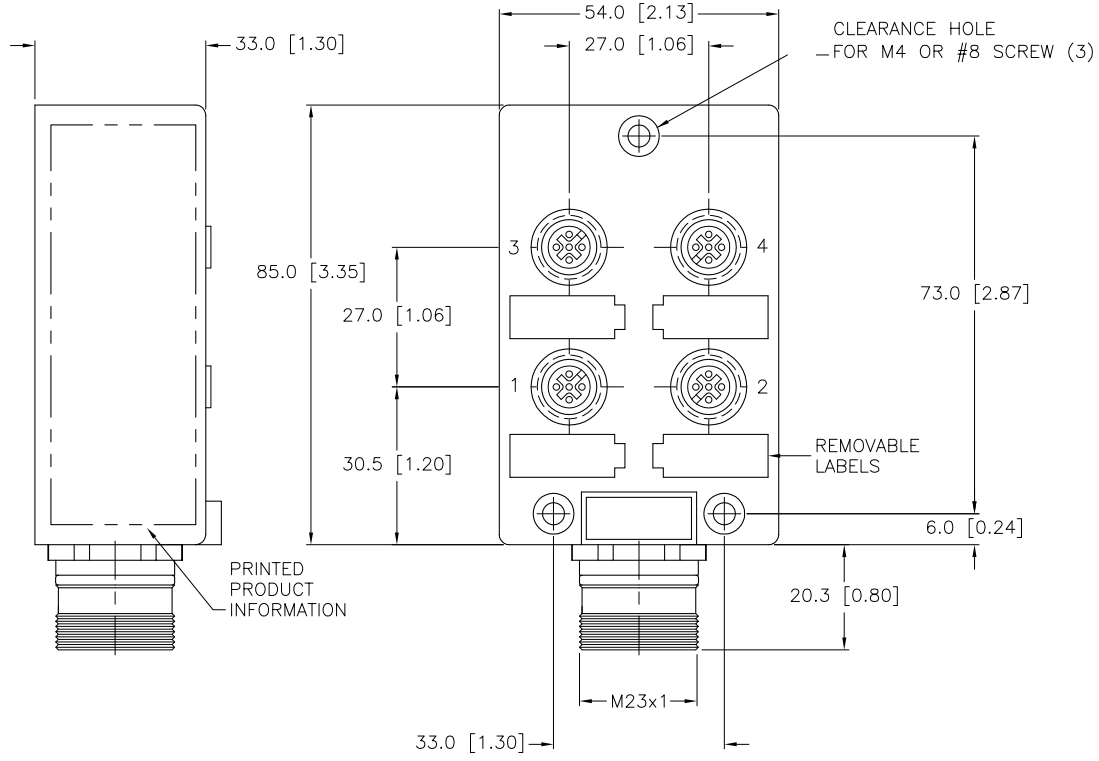


WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY



VZ3 CLOSURE CAPS (2 INCLUDED)



RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL		DRFT RJP	DATE 07/05/96
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DSGN	SCALE 1=1.5	VB 40.5-CS19
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U7016-1
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		REV D
D DRAWING PROCESSED AS PART OF ECO 33971	CBM 04/07/11 33971	FILE: U7016-1		SHEET 1 OF 1
REV DESCRIPTION	BY DATE ECO NO.			