

TYPE PDB

Features

- Range taking
- Valox* insulating base
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy
- UL Recognized rated 90° C and is CSA Certified, rated for 600 volts

Benefits

- Provides great flexibility in using the connector as an in line splice or to reduce conductor size
- Provides a high degree of impact resistance with superior insulating qualities
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors
- Ensures reliability






C

Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-16-2/0-1			2/0-12	1	4-14	6	175	1	M	3/16	Slot
PDB-16-2/0-2			2/0-12	1	4-14	6	175	2	M	3/16	Slot
PDB-16-2/0-3			2/0-12	1	4-14	6	175	3	M	3/16	Slot
PDB-26-2/0-1			2/0-12	2	2-14	6	350	1	M	3/16	Slot
PDB-26-2/0-2			2/0-12	2	2-14	6	350	2	M	3/16	Slot
PDB-26-2/0-3			2/0-12	2	2-14	6	350	3	M	3/16	Slot
PDB-112-350-1			350kcmil-6	1	4-14	12	310	1	L	3/8	Slot
PDB-112-350-2			350kcmil-6	1	4-14	12	310	2	L	3/8	Slot
PDB-112-350-3			350kcmil-6	1	4-14	12	310	3	L	3/8	Slot
PDB-112A-350-1			350kcmil-6	1	4-14	12	310	1	M	3/8	Slot
PDB-112A-350-2			350kcmil-6	1	4-14	12	310	2	M	3/8	Slot
PDB-112A-350-3			350kcmil-6	1	4-14	12	310	3	M	3/8	Slot
PDB-14-500-1			500kcmil-4	1	2/0-14	4	380	1	M	3/8	3/16
PDB-14-500-2			500kcmil-4	1	2/0-14	4	380	2	M	3/8	3/16
PDB-14-500-3			500kcmil-4	1	2/0-14	4	380	3	M	3/8	3/16
PDB-16-350-1			350kcmil-6	1	2/0-14	6	310	1	L	3/8	3/16
PDB-16-350-2			350kcmil-6	1	2/0-14	6	310	2	L	3/8	3/16
PDB-16-350-3			350kcmil-6	1	2/0-14	6	310	3	L	3/8	3/16
PDB-162-500-1			500kcmil-4	1	2-14	6	380	1	M	3/8	Slot
PDB-162-500-2			500kcmil-4	1	2-14	6	380	2	M	3/8	Slot
PDB-162-500-3			500kcmil-4	1	2-14	6	380	3	M	3/8	Slot

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

* Valox® is a registered trade name of the General Electric Company.

Tested to UL 1059, UL File E84782

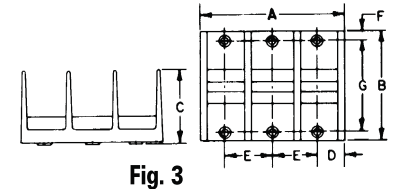

Dimensions

Block Size	Number Of Poles	Figure Number	A	B	C	D	E	F	G	H	J	K
M	1	1	1-27/32	4	2-5/8	31/32	-	5/16	3-3/8	3/8	13/64	13/32
M	2	2	3-13/32	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
M	3	3	5	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
L	1	1	3	5-1/2	3-1/2	1-1/2	-	3/8	4-3/4	7/16	9/32	1/2
L	2	2	5-11/16	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2
L	3	3	8-3/8	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2

Lay-In Type Power Distribution Blocks Dual Rated

TYPE PDB

Features

- Lay-In primary cable ports
- Valox insulating base
- Clear cover
- UL 1059 Recognized and CSA Certified for 600 volts
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy

Benefits


- Designed for feed through of two primary conductors and up to six taps with no need to break the main feeder cable
- Provides a high degree of impact resistance with superior insulating qualities
- Permits visual inspection
- Ensures reliability
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors



Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole			Primary	Secondary
	PDB-26-750-1			750kcmil-250kcmil	2	250kcmil-6			6	950

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
Tested to UL 1059, UL File E84782

F

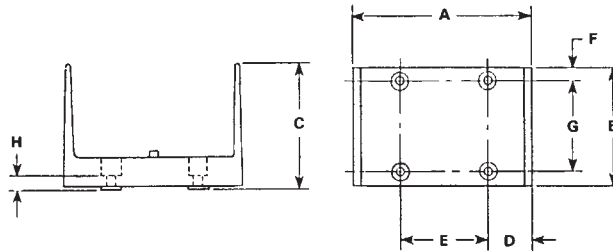

Block Size	No. of Poles	Dimensions							
		A	B	C	D	E	F	G	H
W	1	6-7/32	4	4-3/8	1-19/32	3	3/8	3-1/4	7/16

* Valox® is a registered trade name of the General Electric Company.

TYPE PDB

Features

- Manufactured from high strength 6061-T6 aluminum alloy
- Valox* insulating base
- UL 1059 Recognized 90° C 600 volts
- Electro-tin plated
- Clear cover

Benefits

- Reliable use for copper conductor only
- Provides a high degree of impact resistance with superior insulating qualities
- Ensures reliability
- Provides low contact resistance
- Provides visual inspection



Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary


All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Valox® is a registered trade name of the General Electric Company.

A versatile tap hole, wire range 8-14 AWG included on the connector.

Tested to UL 1059, UL File E84782

‡ Not CSA Certified

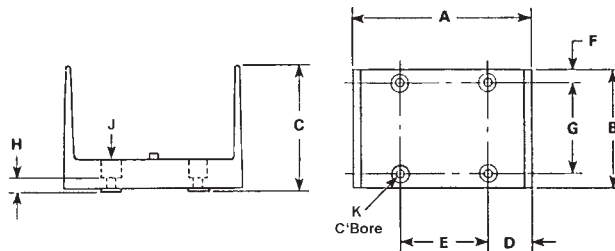

Block Size	No. of Poles	Dimensions									
		A	B	C	D	E	F	G	H	J	K
W	1	6-7/32	4	4-3/8	1-19/32	3	3/8	3-1/4	7/16	9/32	9/16

TYPE PDB

Features

- Multiple taps
- Valox* insulating base
- Clear cover
- UL 1059 Recognized 90° C 600 Volts and is CSA Certified
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy

Benefits

- Three different connector configurations provide a wide range of tapping capabilities for up to four primary conductors
- Provides a high degree of impact resistance with superior insulating qualities
- Permits visual inspection
- Ensures reliability
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors



Fig. 1



Fig. 2



Fig. 3



Fig. 4

Catalog Number	Figure Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number of Poles	Block Size	Hex Size	
		Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-428-500-1	1			500kcmil-4	4	4-14	28	1520	1	W	3/8	Slot
PDB-49-500-1	2			500kcmil-4	4	350kcmil-6 4/0-6	6 3	1520	1	W	3/8	3/8 5/16
‡ PDB-55-500-1	4			500kcmil-3/0	5	500kcmil-3/0	5	1600	1	W	3/8	3/8
PDB-412-500-1	3			500kcmil-4	4	4/0-6	12	1520	1	W	3/8	5/16


All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Valox® is a registered trade name of the General Electric Company.

° A versatile tap hole, wire range 8-14 AWG included on the connector.

‡ Not CSA Certified

Tested to UL 1059, UL File E84782

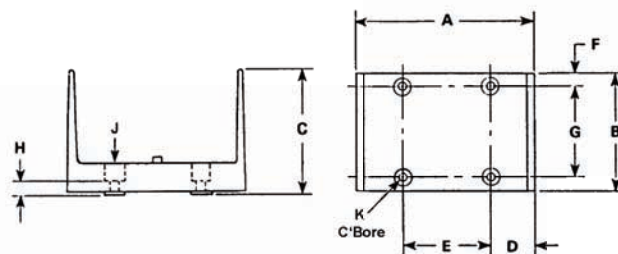

Block Size	No. of Poles	Dimensions									
		A	B	C	D	E	F	G	H	J	K
W	1	6-7/32	4	4-3/8	1-19/32	3	3/8	3-1/8	7/16	9/32	9/16

TYPE PDB

Features

- Range taking
- Valox* insulating base
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy
- UL Recognized rated 90° C and is CSA Certified, rated for 600 volts

Benefits

- Provides great flexibility in using the connector as an in line splice or to reduce conductor size
- Provides a high degree of impact resistance with superior insulating qualities
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors
- Ensures reliability



Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-212-4/0-1			4/0-6	2	4-14	12	460	1	M		
PDB-212-4/0-2			4/0-6	2	4-14	12	460	2	M	3/8	Slot
PDB-212-4/0-3			4/0-6	2	4-14	12	460	3	M		
PDB-26-350-1			350kcmil-6	2	2/0-14	6	620	1	L		
PDB-26-350-2			350kcmil-6	2	2/0-14	6	620	2	L	3/8	3/16
PDB-26-350-3			350kcmil-6	2	2/0-14	6	620	3	L		
PDB-16-500-1			500kcmil-4	1	2/0-14	6	380	1	L		
PDB-16-500-2			500kcmil-4	1	2/0-14	6	380	2	L	3/8	3/16
PDB-16-500-3			500kcmil-4	1	2/0-14	6	380	3	L		
PDB-212-500-1			500kcmil-4	2	4-14	12	760	1	L		
PDB-212-500-2			500kcmil-4	2	4-14	12	760	2	L	3/8	Slot
PDB-212-500-3			500kcmil-4	2	4-14	12	760	3	L		
PDB-24-500-1			500kcmil-4	2	4/0-6	4	760	1	L		
PDB-24-500-2			500kcmil-4	2	4/0-6	4	760	2	L	3/8	5/16
PDB-24-500-3			500kcmil-4	2	4/0-6	4	760	3	L		
PDB-26-500-1			500kcmil-4	2	2/0-14	6	760	1	L		
PDB-26-500-2			500kcmil-4	2	2/0-14	6	760	2	L	3/8	3/16
PDB-26-500-3			500kcmil-4	2	2/0-14	6	760	3	L		

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

* Valox® is a registered trade name of the General Electric Company.

Tested to UL 1059, UL File E84782




Fig. 1




Fig. 2

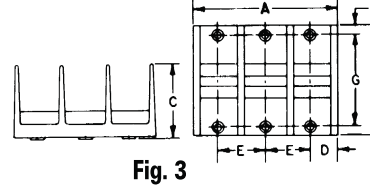


Fig. 3

Dimensions

Block Size	Number Of Poles	Figure Number	A	B	C	D	E	F	G	H	J	K
M	1	1	1-27/32	4	2-5/8	31/32	-	5/16	3-3/8	3/8	13/64	13/32
M	2	2	3-13/32	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
M	3	3	5	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
L	1	1	3	5-1/2	3-1/2	1-1/2	-	3/8	4-3/4	7/16	9/32	1/2
L	2	2	5-11/16	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2
L	3	3	8-3/8	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2

TYPE PDB

Features

- Multiple taps
- Range taking
- Valox* insulating base
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy
- UL Recognized rated 90° C and is CSA Certified, rated for 600 volts

Benefits

- Depending on product selected, up to twelve taps can be taken from one or two mains
- Provides tapping flexibility over a broad wire range
- Provides a high degree of impact resistance with superior insulating qualities
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors
- Ensures reliability



C

Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-11-2/0-1			2/0-14	1	2/0-14	1	175	1	M	3/16	3/16
PDB-11-2/0-2			2/0-14	1	2/0-14	1	175	2	M		
PDB-11-2/0-3			2/0-14	1	2/0-14	1	175	3	M		
PDB-11-350-1			350kcmil-6	1	350kcmil-6	1	310	1	M	3/8	3/8
PDB-11-350-2			350kcmil-6	1	350kcmil-6	1	310	2	M		
PDB-11-350-3			350kcmil-6	1	350kcmil-6	1	310	3	M		
PDB-11-500-1			500kcmil-4	1	500kcmil-4	1	380	1	L	3/8	3/8
PDB-11-500-2			500kcmil-4	1	500kcmil-4	1	380	2	L		
PDB-11-500-3			500kcmil-4	1	500kcmil-4	1	380	3	L		
PDB-22-2/0-1			2/0-14	2	2/0-14	2	350	1	M	3/16	3/16
PDB-22-2/0-2			2/0-14	2	2/0-14	2	350	2	M		
PDB-22-2/0-3			2/0-14	2	2/0-14	2	350	3	M		
PDB-22-350-1			350kcmil-6	2	350kcmil-6	2	620	1	L	3/8	3/8
PDB-22-350-2			350kcmil-6	2	350kcmil-6	2	620	2	L		
PDB-22-350-3			350kcmil-6	2	350kcmil-6	2	620	3	L		
PDB-22-500-1			500kcmil-4	2	500kcmil-4	2	760	1	L	3/8	3/8
PDB-22-500-2			500kcmil-4	2	500kcmil-4	2	760	2	L		
PDB-22-500-3			500kcmil-4	2	500kcmil-4	2	760	3	L		

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

* Valox® is a registered trade name of the General Electric Company.

Tested to UL 1059, UL File E84782




Fig. 1




Fig. 2

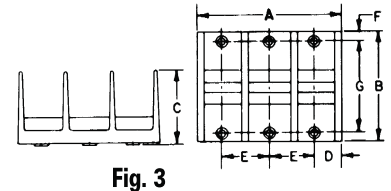


Fig. 3

Dimensions

Block Size	Number Of Poles	Figure Number	A	B	C	D	E	F	G	H	J	K
M	1	1	1-27/32	4	2-5/8	31/32	-	5/16	3-3/8	3/8	13/64	13/32
M	2	2	3-13/32	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
M	3	3	5	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
L	1	1	3	5-1/2	3-1/2	1-1/2	-	3/8	4-3/4	7/16	9/32	1/2
L	2	2	5-11/16	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2
L	3	3	8-3/8	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2

TYPE PDB

Features

- Lay-In primary cable ports
- Valox insulating base
- Clear cover
- UL 1059 Recognized and CSA Certified for 600 volts
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy

Benefits

- Designed for feed through of two primary conductors and up to six taps with no need to break the main feeder cable
- Provides a high degree of impact resistance with superior insulating qualities
- Permits visual inspection
- Ensures reliability
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors




C

Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole			Primary	Secondary
	PDB-26-750-1			750kcmil-250kcmil	2	250kcmil-6			6	950

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Tested to UL 1059, UL File E84782

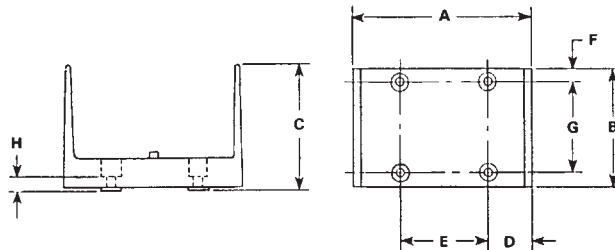

Block Size	No. of Poles	Dimensions							
		A	B	C	D	E	F	G	H
W	1	6-7/32	4	4-3/8	1-19/32	3	3/8	3-1/4	7/16

* Valox® is a registered trade name of the General Electric Company.

TYPE PDB

Features

- Manufactured from high strength 6061-T6 aluminum alloy
- Valox* insulating base
- UL 1059 Recognized 90° C 600 volts
- Electro-tin plated
- Clear cover

Benefits

- Reliable use for copper conductor only
- Provides a high degree of impact resistance with superior insulating qualities
- Ensures reliability
- Provides low contact resistance
- Provides visual inspection



Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary


All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Valox® is a registered trade name of the General Electric Company.

A versatile tap hole, wire range 8-14 AWG included on the connector.

Tested to UL 1059, UL File E84782

‡ Not Csa Certified

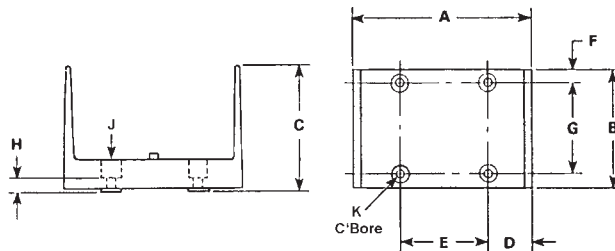

Block Size	No. of Poles	Dimensions									
		A	B	C	D	E	F	G	H	J	K
W	1	6-7/32	4	4-3/8	1-19/32	3	3/8	3-1/4	7/16	9/32	9/16

TYPE PDB

Features

- Multiple taps
- Valox* insulating base
- Clear cover
- UL 1059 Recognized 90° C 600 Volts and is CSA Certified
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy

Benefits

- Three different connector configurations provide a wide range of tapping capabilities for up to four primary conductors
- Provides a high degree of impact resistance with superior insulating qualities
- Permits visual inspection
- Ensures reliability
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Catalog Number	Figure Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number of Poles	Block Size	Hex Size	
		Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-428-500-1	1			500kcmil-4	4	4-14	28	1520	1	W	3/8	Slot
PDB-49-500-1	2			500kcmil-4	4	350kcmil-6 4/0-6	6 3	1520	1	W	3/8	3/8 5/16
‡ PDB-55-500-1	4			500kcmil-3/0	5	500kcmil-3/0	5	1600	1	W	3/8	3/8
PDB-412-500-1	3			500kcmil-4	4	4/0-6	12	1520	1	W	3/8	5/16


All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Valox® is a registered trade name of the General Electric Company.

° A versatile tap hole, wire range 8-14 AWG included on the connector.

‡ Not CSA Certified

Tested to UL 1059, UL File E84782

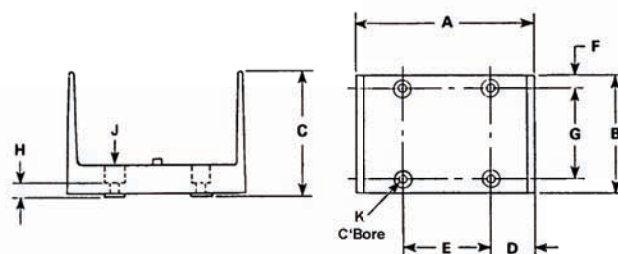

Block Size	No. of Poles	Dimensions									
		A	B	C	D	E	F	G	H	J	K
W	1	6-7/32	4	4-3/8	1-19/32	3	3/8	3-1/8	7/16	9/32	9/16

TYPE PDB

Features

- Range taking
- Valox* insulating base
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy
- UL Recognized rated 90° C and is CSA Certified, rated for 600 volts

Benefits




- Provides great flexibility in using the connector as an in line splice or to reduce conductor size
- Provides a high degree of impact resistance with superior insulating qualities
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors
- Ensures reliability



Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-16-2/0-1			2/0-12	1	4-14	6	175	1	M		
PDB-16-2/0-2			2/0-12	1	4-14	6	175	2	M	3/16	Slot
PDB-16-2/0-3			2/0-12	1	4-14	6	175	3	M		
PDB-26-2/0-1			2/0-12	2	2-14	6	350	1	M		
PDB-26-2/0-2			2/0-12	2	2-14	6	350	2	M	3/16	Slot
PDB-26-2/0-3			2/0-12	2	2-14	6	350	3	M		
PDB-112-350-1			350kcmil-6	1	4-14	12	310	1	L		
PDB-112-350-2			350kcmil-6	1	4-14	12	310	2	L	3/8	Slot
PDB-112-350-3			350kcmil-6	1	4-14	12	310	3	L		
PDB-112A-350-1			350kcmil-6	1	4-14	12	310	1	M		
PDB-112A-350-2			350kcmil-6	1	4-14	12	310	2	M	3/8	Slot
PDB-112A-350-3			350kcmil-6	1	4-14	12	310	3	M		
PDB-14-500-1			500kcmil-4	1	2/0-14	4	380	1	M		
PDB-14-500-2			500kcmil-4	1	2/0-14	4	380	2	M	3/8	3/16
PDB-14-500-3			500kcmil-4	1	2/0-14	4	380	3	M		
PDB-16-350-1			350kcmil-6	1	2/0-14	6	310	1	L		
PDB-16-350-2			350kcmil-6	1	2/0-14	6	310	2	L	3/8	3/16
PDB-16-350-3			350kcmil-6	1	2/0-14	6	310	3	L		
PDB-162-500-1			500kcmil-4	1	2-14	6	380	1	M		
PDB-162-500-2			500kcmil-4	1	2-14	6	380	2	M	3/8	Slot
PDB-162-500-3			500kcmil-4	1	2-14	6	380	3	M		

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
* Valox* is a registered trade name of the General Electric Company.

Tested to UL 1059, UL File E84782

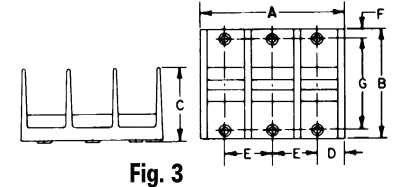

Dimensions

Block Size	Number Of Poles	Figure Number	A	B	C	D	E	F	G	H	J	K
M	1	1	1-27/32	4	2-5/8	31/32	-	5/16	3-3/8	3/8	13/64	13/32
M	2	2	3-13/32	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
M	3	3	5	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
L	1	1	3	5-1/2	3-1/2	1-1/2	-	3/8	4-3/4	7/16	9/32	1/2
L	2	2	5-11/16	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2
L	3	3	8-3/8	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2

TYPE PDB

Features

- Range taking
- Valox* insulating base
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy
- UL Recognized rated 90° C and is CSA Certified, rated for 600 volts

Benefits

- Provides great flexibility in using the connector as an in line splice or to reduce conductor size
- Provides a high degree of impact resistance with superior insulating qualities
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors
- Ensures reliability



F

Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-212-4/0-1			4/0-6	2	4-14	12	460	1	M		
PDB-212-4/0-2			4/0-6	2	4-14	12	460	2	M	3/8	Slot
PDB-212-4/0-3			4/0-6	2	4-14	12	460	3	M		
PDB-26-350-1			350kcmil-6	2	2/0-14	6	620	1	L		
PDB-26-350-2			350kcmil-6	2	2/0-14	6	620	2	L	3/8	3/16
PDB-26-350-3			350kcmil-6	2	2/0-14	6	620	3	L		
PDB-16-500-1			500kcmil-4	1	2/0-14	6	380	1	L		
PDB-16-500-2			500kcmil-4	1	2/0-14	6	380	2	L	3/8	3/16
PDB-16-500-3			500kcmil-4	1	2/0-14	6	380	3	L		
PDB-212-500-1			500kcmil-4	2	4-14	12	760	1	L		
PDB-212-500-2			500kcmil-4	2	4-14	12	760	2	L	3/8	Slot
PDB-212-500-3			500kcmil-4	2	4-14	12	760	3	L		
PDB-24-500-1			500kcmil-4	2	4/0-6	4	760	1	L		
PDB-24-500-2			500kcmil-4	2	4/0-6	4	760	2	L	3/8	5/16
PDB-24-500-3			500kcmil-4	2	4/0-6	4	760	3	L		
PDB-26-500-1			500kcmil-4	2	2/0-14	6	760	1	L		
PDB-26-500-2			500kcmil-4	2	2/0-14	6	760	2	L	3/8	3/16
PDB-26-500-3			500kcmil-4	2	2/0-14	6	760	3	L		

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
* Valox® is a registered trade name of the General Electric Company.

Tested to UL 1059, UL File E84782




Fig. 1




Fig. 2

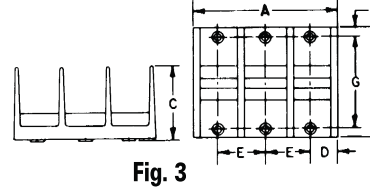


Fig. 3

Dimensions

Block Size	Number Of Poles	Figure Number	A	B	C	D	E	F	G	H	J	K
M	1	1	1-27/32	4	2-5/8	31/32	-	5/16	3-3/8	3/8	13/64	13/32
M	2	2	3-13/32	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
M	3	3	5	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
L	1	1	3	5-1/2	3-1/2	1-1/2	-	3/8	4-3/4	7/16	9/32	1/2
L	2	2	5-11/16	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2
L	3	3	8-3/8	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2

TYPE PDB

Features

- Multiple taps
- Range taking
- Valox® insulating base
- Electro-tin plated
- Manufactured from high strength 6061-T6 aluminum alloy
- UL Recognized rated 90° C and is CSA Certified, rated for 600 volts

Benefits

- Depending on product selected, up to twelve taps can be taken from one or two mains
- Provides tapping flexibility over a broad wire range
- Provides a high degree of impact resistance with superior insulating qualities
- Provides low contact resistance
- Suitable for use with either copper or aluminum conductors
- Ensures reliability



Catalog Number	Connector		Primary		Secondary		Ampere Rating Per Pole	Number Of Poles	Block Size	Hex Size	
	Primary	Secondary	Wire Range	Openings Per Pole	Wire Range	Openings Per Pole				Primary	Secondary
PDB-11-2/0-1			2/0-14	1	2/0-14	1	175	1	M	3/16	3/16
PDB-11-2/0-2			2/0-14	1	2/0-14	1	175	2	M		
PDB-11-2/0-3			2/0-14	1	2/0-14	1	175	3	M		
PDB-11-350-1			350kcmil-6	1	350kcmil-6	1	310	1	M	3/8	3/8
PDB-11-350-2			350kcmil-6	1	350kcmil-6	1	310	2	M		
PDB-11-350-3			350kcmil-6	1	350kcmil-6	1	310	3	M		
PDB-11-500-1			500kcmil-4	1	500kcmil-4	1	380	1	L	3/8	3/8
PDB-11-500-2			500kcmil-4	1	500kcmil-4	1	380	2	L		
PDB-11-500-3			500kcmil-4	1	500kcmil-4	1	380	3	L		
PDB-22-2/0-1			2/0-14	2	2/0-14	2	350	1	M	3/16	3/16
PDB-22-2/0-2			2/0-14	2	2/0-14	2	350	2	M		
PDB-22-2/0-3			2/0-14	2	2/0-14	2	350	3	M		
PDB-22-350-1			350kcmil-6	2	350kcmil-6	2	620	1	L	3/8	3/8
PDB-22-350-2			350kcmil-6	2	350kcmil-6	2	620	2	L		
PDB-22-350-3			350kcmil-6	2	350kcmil-6	2	620	3	L		
PDB-22-500-1			500kcmil-4	2	500kcmil-4	2	760	1	L	3/8	3/8
PDB-22-500-2			500kcmil-4	2	500kcmil-4	2	760	2	L		
PDB-22-500-3			500kcmil-4	2	500kcmil-4	2	760	3	L		

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
* Valox® is a registered trade name of the General Electric Company.

Tested to UL 1059, UL File E84782




Fig. 1




Fig. 2

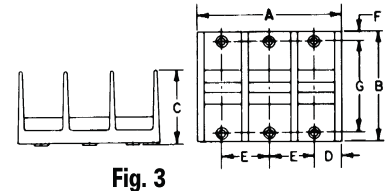


Fig. 3

Dimensions

Block Size	Number Of Poles	Figure Number	A	B	C	D	E	F	G	H	J	K
M	1	1	1-27/32	4	2-5/8	31/32	-	5/16	3-3/8	3/8	13/64	13/32
M	2	2	3-13/32	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
M	3	3	5	4	2-5/8	31/32	1-17/32	5/16	3-3/8	3/8	13/64	13/32
L	1	1	3	5-1/2	3-1/2	1-1/2	-	3/8	4-3/4	7/16	9/32	1/2
L	2	2	5-11/16	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2
L	3	3	8-3/8	5-1/2	3-1/2	1-1/2	2-11/16	3/8	4-3/4	7/16	9/32	1/2