

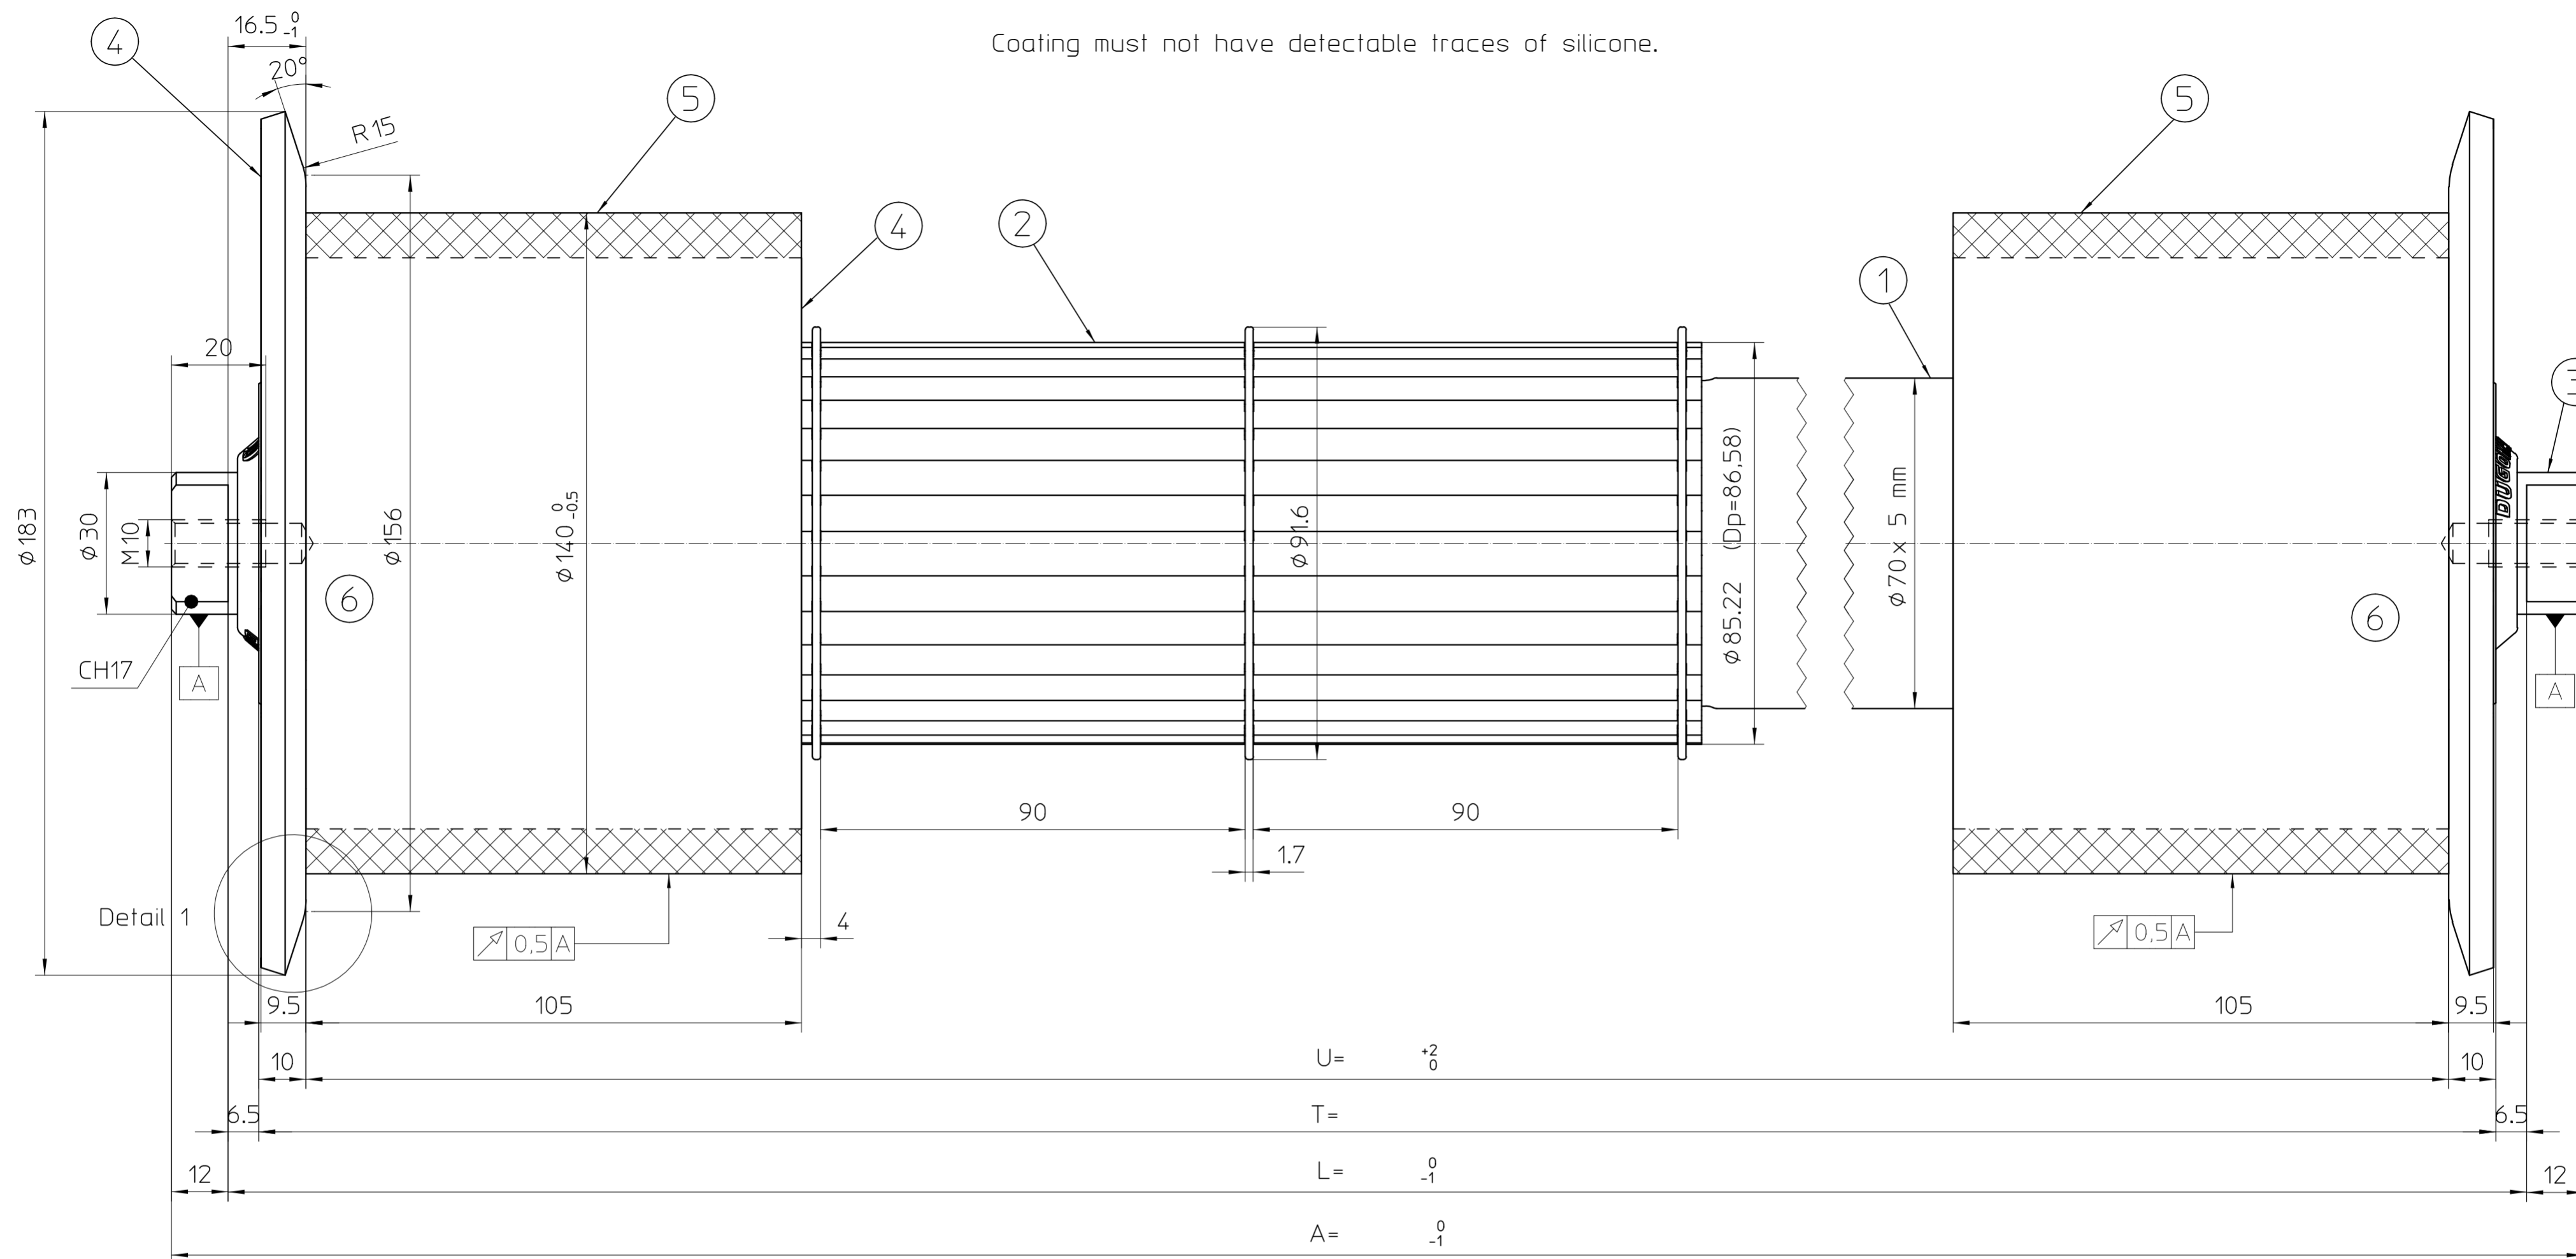


Coating must not have detectable traces of silicone.

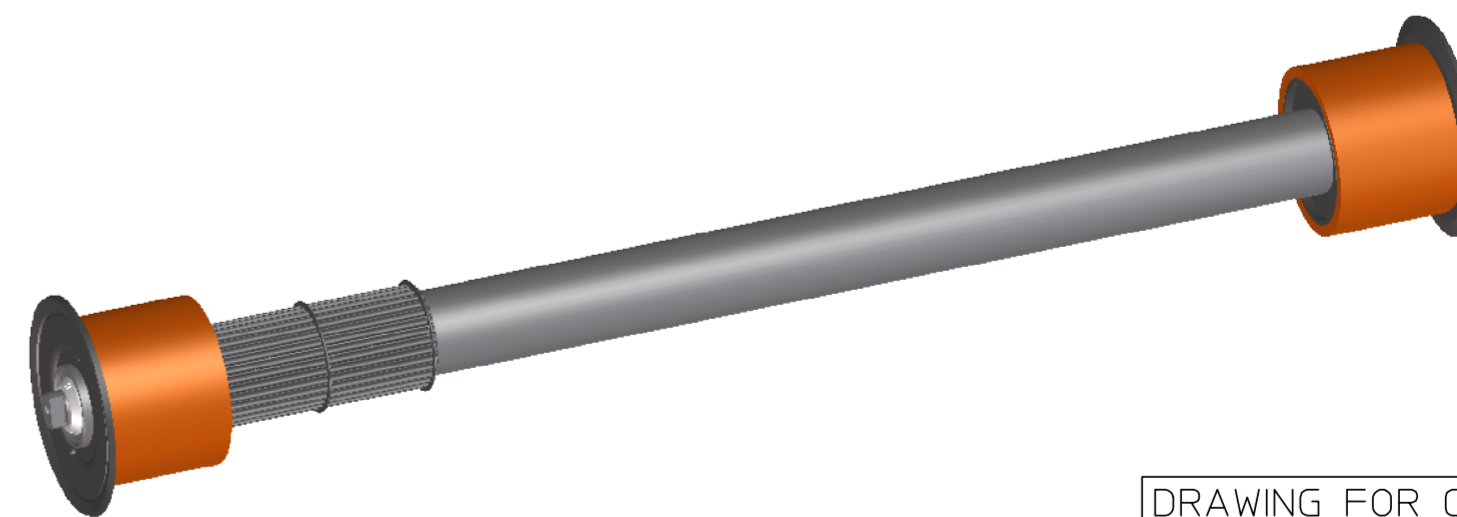

1	Tube dia. 70x5 mm EN 10025-S235 or similar/higher.
2	Pulley Z34 HTD 8M-85 Dp=86.58 De=85.22 EN10025-S235 JRG2 and snap rings SP85 DIN 5417
3	Axle dia. 30 mm EN 10025-S235 with threaded holes M10x20 mm and milled ends dim. 17x12 mm.
4	Flange dia. 183x6 (hardened) and flange dia. 112x5 mm made by EN 10111 DD11 or similar/higher.
5	Polyurethane coating hardness 95 +/-3 Shore A.
6	Single row rigid radial precision bearings type 6206-2RS lifetime lubrication.

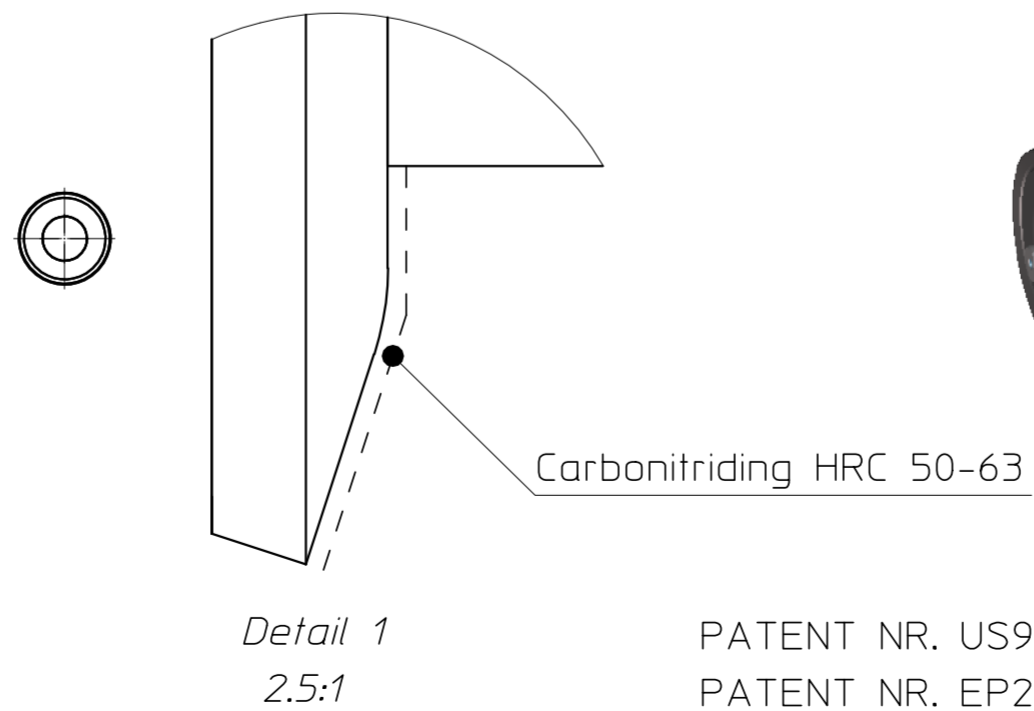

DRAWING FOR CUSTOMER

PATENT NR. US9359145
 PATENT NR. EP2985245
 PATENT NR. IT0001429410

DESCRIZIONE ULTIMA MODIFICA		ESEGUITA	APPROV.
05	Aggiornamento TY.	Pace	Gamberini
DENOMINAZIONE		TOLLERANZE DIM. E FORMA:	
D140/70/30 Z34 HTD8M-85 DRIVEN ROLLER		T268-01-00 T268-03-00	
POLYURETHANE COATED-DE183 HARDENED FLANGES		SALDATURE: T287-01-00	
MODIFICHE		DATA	
		00	13/11/14 3466
		01	05/03/15 3586
		02	07/06/16 NO
		03	01/09/16 3977
		04	31/01/17 4010
		05	09/06/17 4076
DIS. Rizza DATA 13/11/14		SCALA 1:1	FORM. A2
CONTR. Rizza APPROV. Rizza		PESO -	
DIS.N. 329638V			
SOSTITUISCE -			
VIA INIEVO,8-1-40069 ZOLA PREDOSA (BO)			
TEL:051/755406-TELEFAX:051/758989			

A norma di legge il presente disegno non puo' essere riprodotto od in qualsiasi modo comunicato a terzi senza nostra autorizzazione scritta