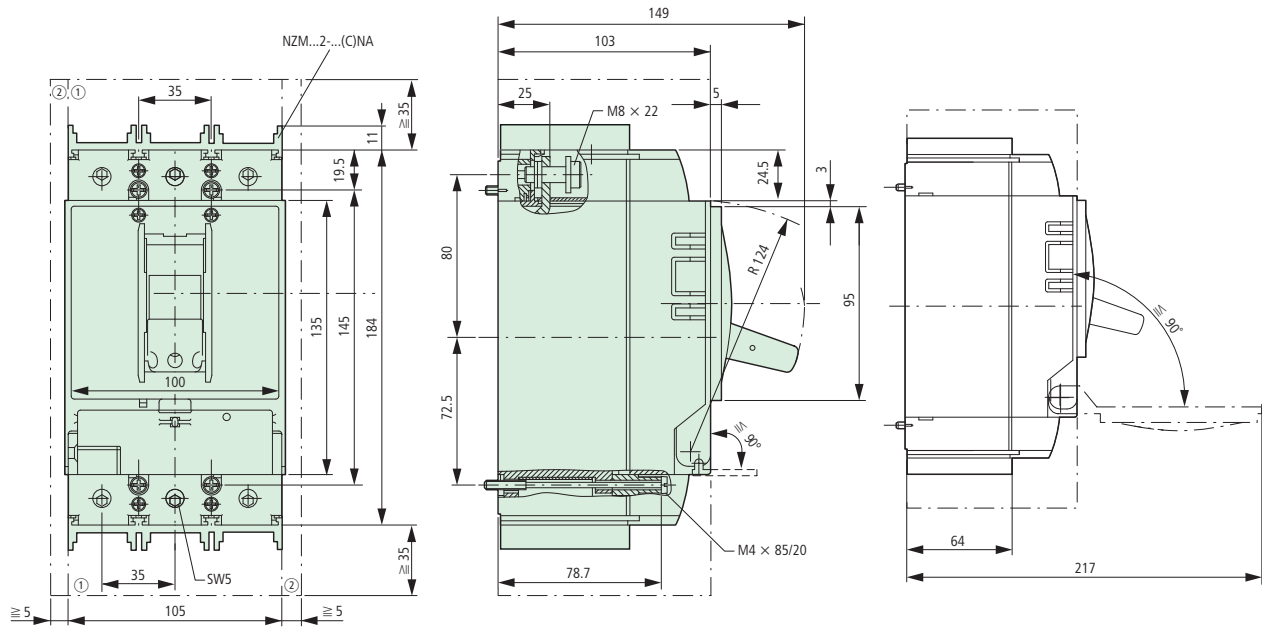


Circuit-breaker, disconnect switch, 3-pole
 NZMB2, NZMN2, NZMH2, NS2


- ① Blow out area, minimum clearance to other parts ≥ 35 mm
- ② Minimum clearance from adjacent parts ≥ 5 mm