

WIRING

- 1 - Common power supply
- 2 - Power supply 110 Va.c. 50/60 Hz
- 3 - Power supply 220 Va.c. 50/60 Hz
- 6 - NC contact 10A/250 Va.c.
- 7 - Common contacts
- 8 - NO contact 10A/250 Va.c.


Ambient temperature range -20 to $+70$ °C
 Weight : AT/F 2.800 Kg - AT 3.000 Kg
 On request power supply at 24/48 Va.c. 50/60 Hz or power supply at 24 Vd.c.

Electric motor draw 4 W

Maximum operational pressure 1.1 bar

Max. temperature inside storage bin 200 °C

Certificate number TÜV IT 13 ATEX 070
 Marking: II 1/2 D Ex ta/ib IIC T85°C IP65 Da/Db

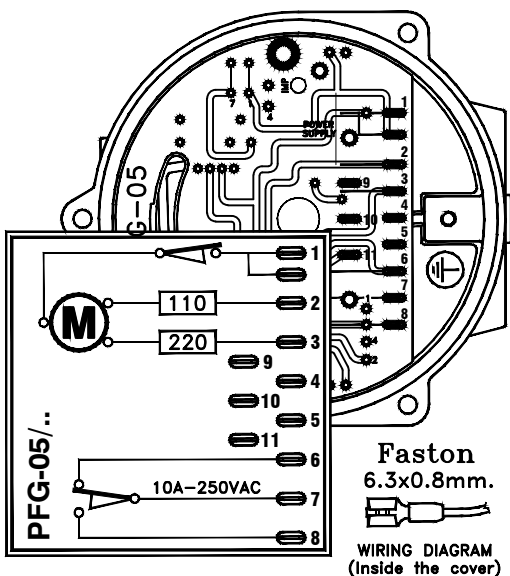

IP65 Protection