

Secret

Relief valve
(possible to install)
Model: JR-G01-3L


Nomenclature

LRV-4 3 A

Pressure setting range
(Pilot valve)
A : 3~12MPa
Discharge port size
3 : Rc3/8
Series No.

Specifications

Model No.	LRV-43A
Piping system	Loop type
Max. working pressure(MPa)	21
Set reversing pressure at delivery(MPa)	5
Reversing pressure setting range(MPa)	3~12
Amount of reversing loss(cm ³)	2.81
Pressure proof(MPa)	31
Applicable grease	Centralized lubricating grease #0~#1-NLGI
Net weight(kg)	8

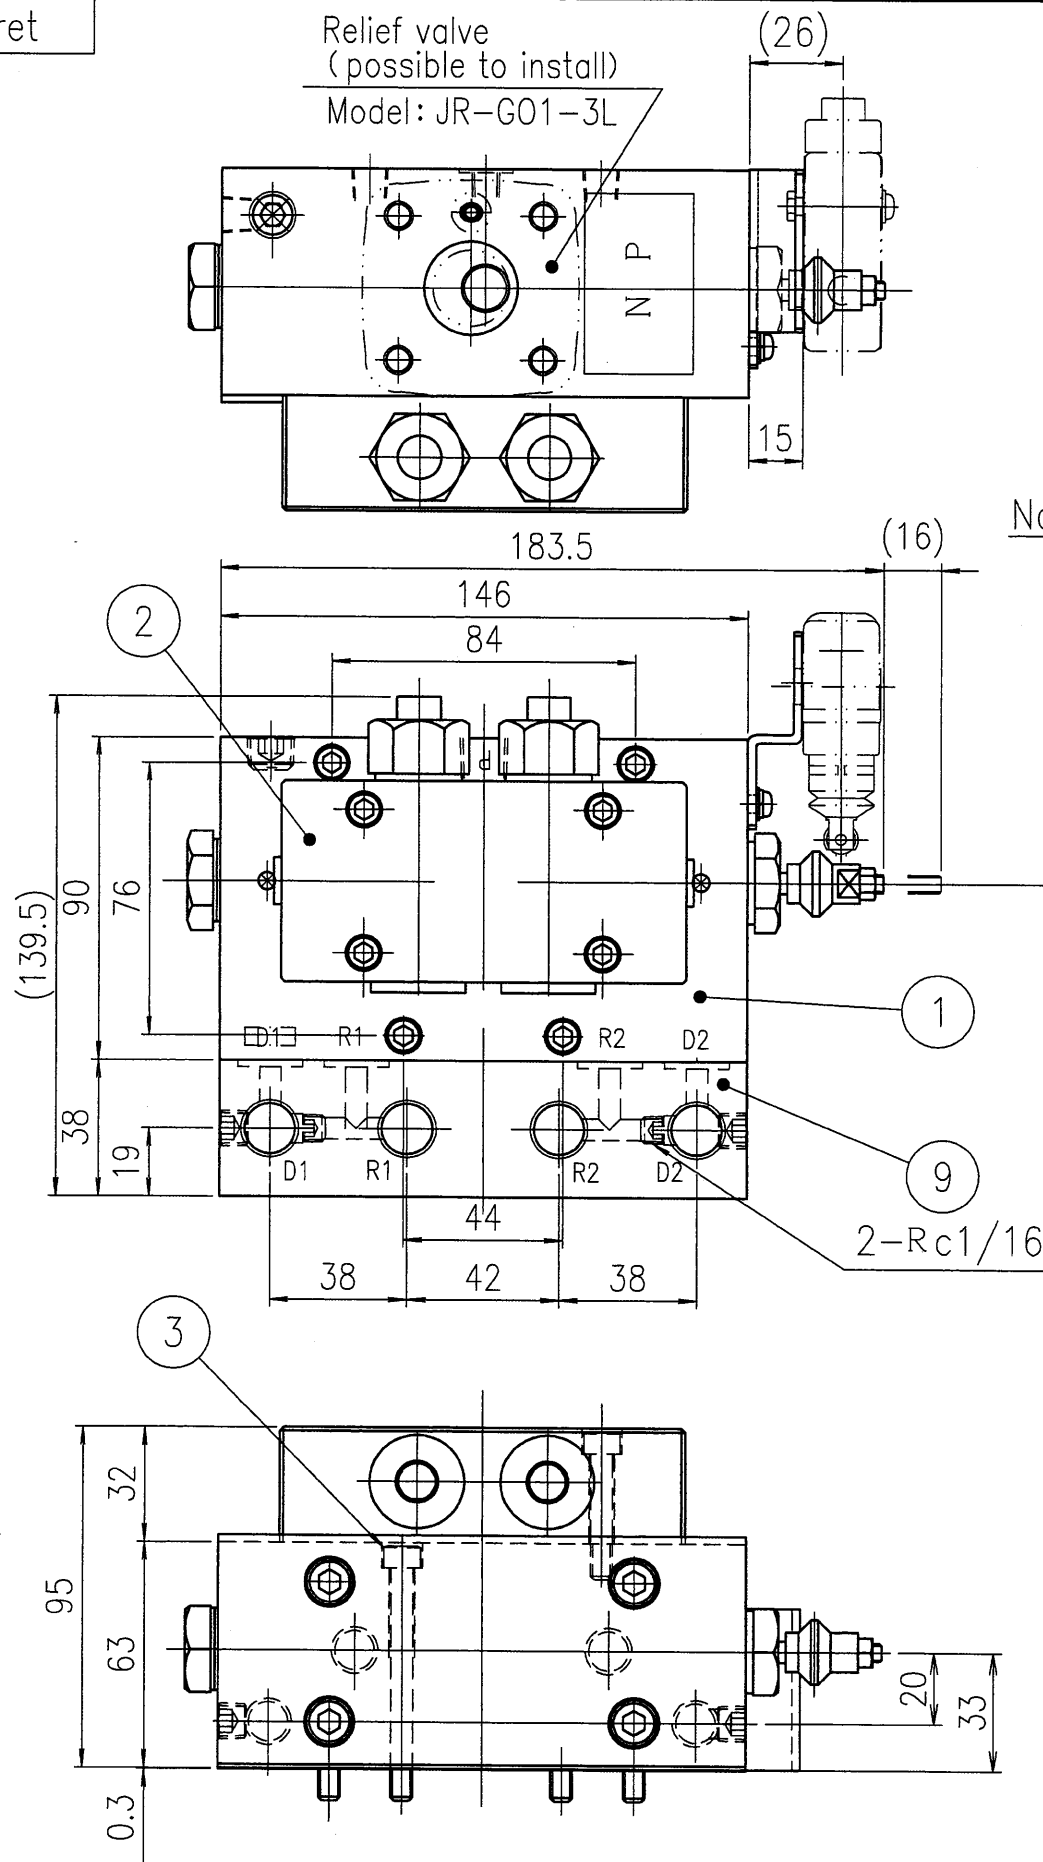

Notes A

View B

Developed view

Notes : LS bracket can be changed to be installed in the front by using screw hole of A portion.

Piping size
P port : (Rc1/16)
T port : (Rc1/8)
D1 D2 port : Rc3/8
R1 R2 port : Rc3/8

REF. NO.	PART NO.	PART NAME	QTY.	REMARKS
10	AAM0804001	Hexagon socket head cap screw	4	M8X 40L
9	1121229	Outlet block	1	
8	KP1B010	"O" Ring	1	1B P10 JIS B2401
7	1144040	Cup seal	1	
6	1144039-2	Reversing valve packing	1	t=0.3
5	1132541	Limit switch(Option)	(1)	ZC-N2155-MR VCT3m
4	1146459-4	LS bracket	1	
3	AAM0606501	Hexagon socket head cap screw	4	M6X 65L
2	1121228-1	Pilot valve	1	LRP-8A
1	1111017	Reversing valve	1	LRV-43A

REV	DATE	DRAWN	CHK'D	APPR.D
△				
△	May-21-2013	M.OHASHI		<i>Y. Hirose</i>
△	May-13-2004	M.OHASHI	Y.HIROSE	H.NISHIMATSU
△	Jun.-27-2003	M.OHASHI	Y.HIROSE	H.NISHIMATSU

TITLE LRV-43A REVERSING VALVE Dimensions

DAIKIN LUBRICATION PRODUCTS & ENGINEERING CO.,LTD. DWG NO. FC32050E SCALE 1/2