



TAG NO. A0EKG00AA915

TEST GAG is provided

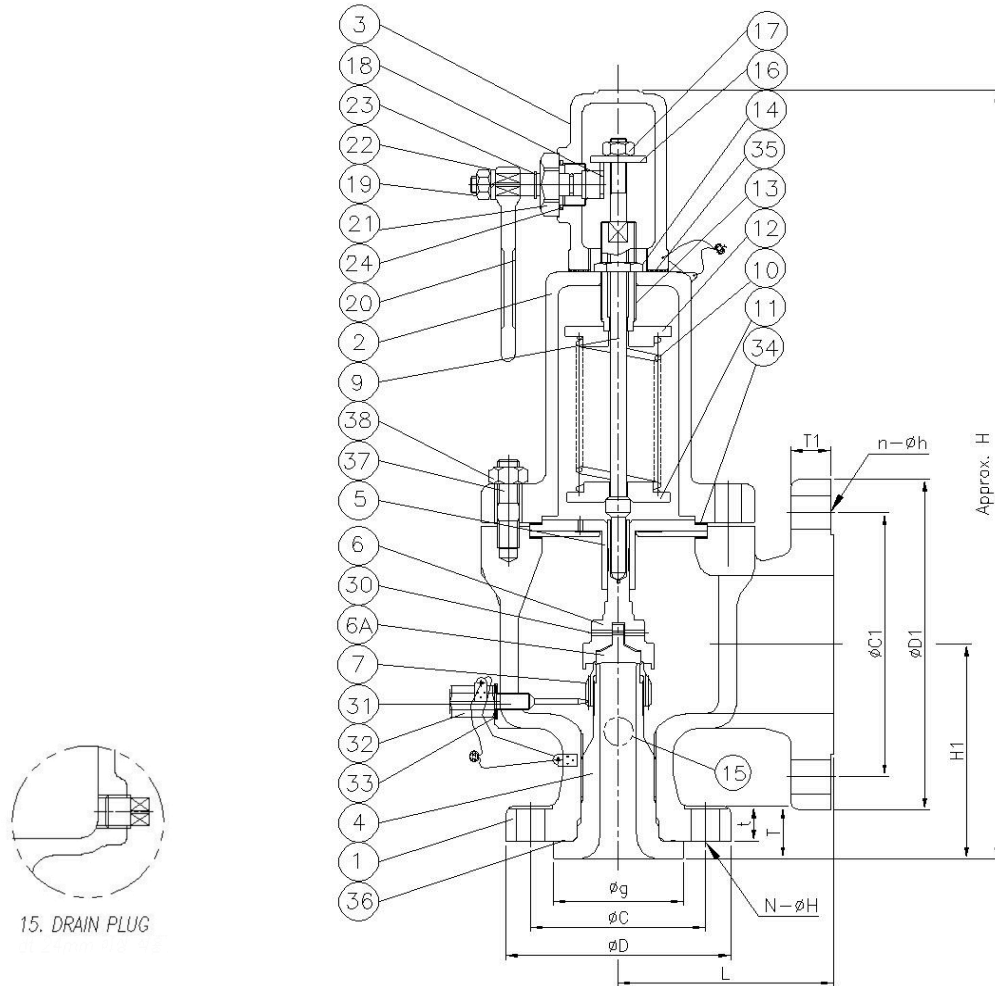

15. DRAIN PLUG

DIMENSION

UNIT : mm

SIZE	L	H1	H	INLET FLANGE ASME B 165 CL600 RF						OUTLET FLANGE ASME B 165 CL150 RF				Wt(kg)	
				ØD	Øg	ØC	ØP	T	t	N-ØH	ØD1	ØC1	T1		n-Øh
3/4"xD1x1"	96	87	320	115	429	826	-	23	16	4-19	110	794	127	4-16	9.7

NO	PART NAME	MATERIAL	QTY	REMARK
38	STUD NUT	SA194 2H	4	
37	STUD BOLT	SA193 B7	4	
36	GASKET (SEAT)	PTFE	1	
35	GASKET (CAP)	PTFE	2	
34	GASKET (BODY)	Graphite	2	
33	GASKET (SET SCREW)	PTFE	1	
32	CAP NUT	316 SS	1	
31	SET SCREW	316 SS	1	
30	SPRING PIN	Steel	1	
24	O-RING	NBR	1	
23	SNAP RING	Steel	1	
22	SPRING WASHER	Steel	1	
21	GLAND NUT	316 SS	1	
20	LEVER	Carbon Steel	1	
19	NUT (SHAFT)	316 SS	1	
18	CAM SHAFT	316 SS	1	
17	STEM NUT	316 SS	1	
16	STEM WASHER	316 SS	1	
15	PLUG	316 SS	1	
14	LOCK NUT	316 SS	1	
13	ADJUST SCREW	316 SS	1	
12	SPRING SEAT (UPP)	Carbon Steel	1	
11	SPRING SEAT (LOW)	Carbon Steel	1	
10	SPRING	316 SS	1	
9	STEM	316 SS	1	
7	ADJUST RING	316 SS	1	
6A	DISC	316 SS -st	1	
6	HOLDER	316 SS	1	
5	GUIDE	316 SS	1	
4	SEAT	316 SS -st	1	
3	CAP	Carbon Steel	1	
2	BONNET	SA216 WCB	1	
1	BODY	SA216 WCB	1	

DWG NO	JKS-SLQ074975-10	Designed	Checked	Approved
MODEL	JSV-FF100	<i>JL</i>	<i>LM</i>	<i>SP</i>
DATE	2024-07-04	JKYOON	HMMUN	SYPARK

FULL BORE TYPE SAFETY RELIEF VALVE				REV
<b>JOKWANG ILI</b>				0